



No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
Δ			
Δ			

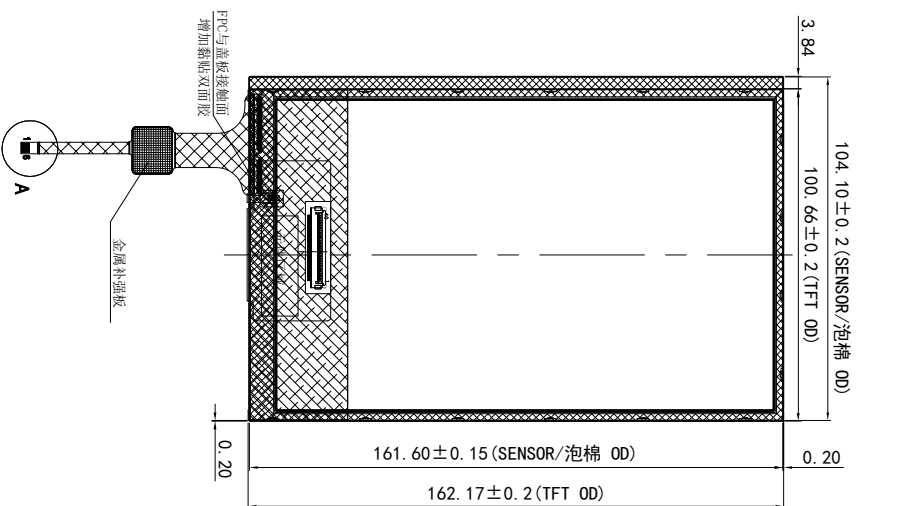

Screen printing area: Print Black

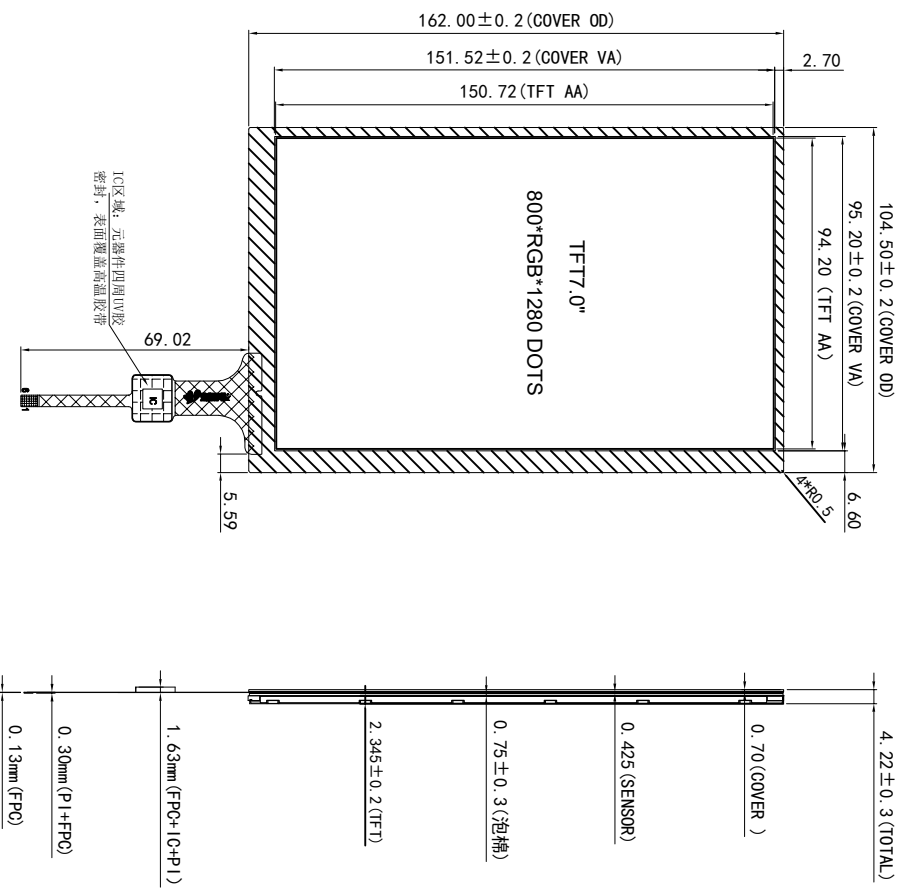

Frame Adhesive Foam Area = 0.75mm

Front view


Side view

Back view

1	VCOM
2	VCOM
3	NC
4	VDD
5	VDD
6	GND
7	D 3N
8	D 3P
9	GND
10	D 2N
11	D 2P
12	GND
13	CLKN
14	CLKP
15	GND
16	D 1N
17	D 1P
18	GND
19	D 0N
20	D 0P
21	GND
22	LVFMT
23	RESET
24	LVBIT
25	DITHER
26	NC
27	AVDD
28	AVDD
29	GND
30	LED-
31	LED-
32	NC
33	VGL
34	VGL
35	NC
36	VGH
37	VGH
38	NC
39	LED+
40	LED+

Technical parameters

Technical parameters	TP	PIN:
1. Interfaces:	IIC	GND
2. Structure :	G+F+F	VCC(3.3V)
3. IC solutions:	FT5316	INT(3.3V)
4. Input resistance:	25.00Ω/14.00Ω/14.00Ω/14.00Ω/14.00Ω	RST(3.3V)
5. Touch points:	10 points	SCL(3.3V)
6. Power supply:	3.3V	SDA(3.3V)
7. Humidity range:	45~85%RH	
8. Transmittance:	≥85%	
9. Surface hardness:	≥6H	
10. Operate :	-10°C~+60°C, ≤85%RH	
11. Storage :	-20°C~+70°C, ≤85%RH	
12. Unmarked dimension tolerance as±0.2		



杭州宏梟科技有限公司  
Grahwolet Technology CO., Ltd

Model	Version	Designer	Date	View direction	Unit
HX0701803	V2.0	LIU0	2018-08-17		MM
Customer	Approved	HBZ	Date	2018-08-17	Proportion
					1:1